

Supersession Alternator belt pulley 535 0117 10 by Over-Running Alternator Pulley 535 0105 10

Manufacturer:

Dacia, Renault

LuK-AS-No. old: 535 0117 10

LuK-AS-No. new: 535 0105 10

OE-No.:

• **Renault** 77 00 110 616

Alternator No.: 82 00 323 137



Fig. 1: 535 0117 10

The alternator belt pulley 535 0117 10 (Fig. 1) is no longer available and has been replaced by over-running alternator pulley 535 0105 10 (Fig. 2).



Fig. 2: 535 0105 10

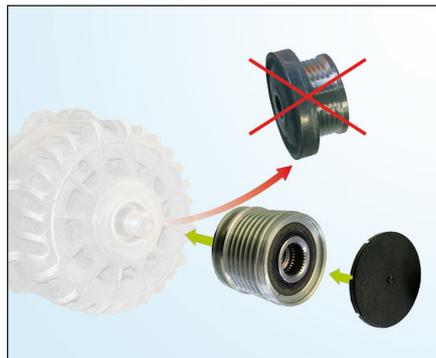


Fig. 3: View of the replacement

INA reference content:

- 1 x Over-Running Alternator Pulley
- 1 x Seal cap

Assembly note:

1. Slacken tensioner and remove poly V-Belt
2. Check all belt drive components for damage - replace damaged components
3. Remove the original belt pulley from the alternator (see Fig. 3)
4. Assemble the Over-Running Alternator Pulley **535 0105 10** with the relevant special tool (see Fig. 4)
5. Assemble the seal cap on the Over-Running Alternator Pulley – **Ensuring it is seated correctly and is a tight fit!**
6. Assemble the poly V-Belt

 Vehicle manufacturer instructions must be complied with!

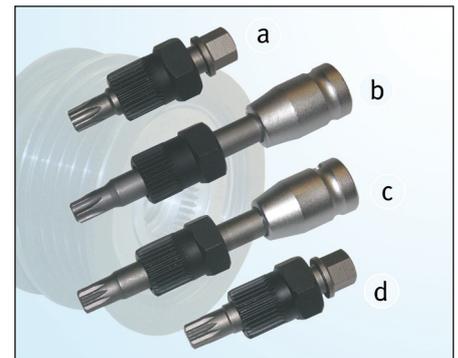


Fig. 4: Special tools overview

- a. 400 0235 10 (Torx, short)
- b. 400 0201 10 (Torx, standard)
- c. 400 0200 10 (Polygon head, standard)
- d. 400 0234 10 (Polygon head, short)

Important:

A failure in the alternator belt pulley could interfere with the primary drive belt and cause expensive engine damage.

Appropriate spare parts can be found in our on-line catalogue at www.Schaeffler-Aftermarket.com or at www.RepXpert.com.

Issued 11.2008

INA 0026

Technical subject to change

© 2008 LuK-Aftermarket Service oHG

For further information:

Phone: +44 (0) 14 32 264 264*

Fax: +44 (0) 14 32 275 146

Info@LuK-AS.co.uk

www.Schaeffler-Aftermarket.com

* Calls from within the UK 08457 001100

