
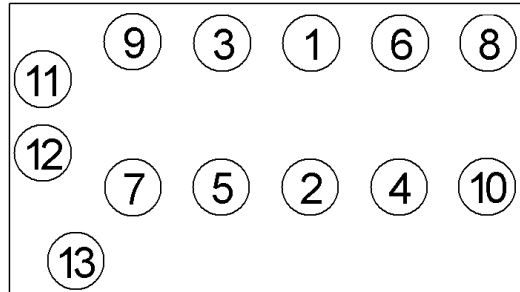


| | | | |
|--|---|---|---------------------|
| Anziehvorschrift für Zylinderkopf | 691.880 |  | |
| Tightening Instructions for Cylinder Head | | | |
| Instructions de serrage pour culasse | | | |
| Prescripciones de apriete para culatas | | | |
| | passend für / suitable for adaptable à / adaptable a | Nissan | Das Original |

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo



Anziehen/ ⚙ 1-10 = 62-72 Nm
Tightening/ ➤ 1-10: loosen -360°
Serrage/ 1-13 = 22-32 Nm
Apriete ➤ 1-10: tighten 90-95°

Zeichenerklärung / Explanations / Explication / Explicacion

| | | | | |
|---|---|------------------------------|--------------------------------|--------------------------------------|
| ⚙ | neue Zylinderkopf-schrauben verwenden | use new cylinder head bolts | utiliser des vis neuves | emplar tornillos nuevos |
| * | Warmlauf (80°C) | warm up time (80°C) | chauffage (80°C) | calentamiento (80°C) |
| □ | Schrauben einzeln lösen und wieder anziehen | loosen and tighten each bolt | deserrer et serrer vis par vis | afojar y apretar tornillo a tornillo |
| ● | Setzzeit | relaxation time | durée de tassement | tiempo de espera |
| ➤ | Drehwinkel | torque angle | angle de serrage | ángulo de giro |

Motortyp / Engine type / Type de moteur / Tipo de motor

Mot: CR12DE

1,2 ltr.
48-59 kW (65-80 PS)

Micra 2003-

ElringKlinger AG, Max-Eyth-Str.2
72581 Dettingen / Erms. Tel. 07123/724 601

691.880