
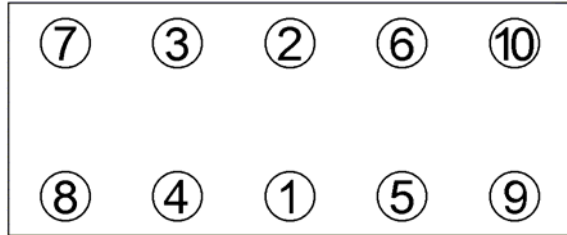


|  |   |  |
|--|---|--|
| <b>Anziehvorschrift für Zylinderkopf</b>         | <b>732.180</b><br>passend für / suitable for<br>adaptable à / adaptable a<br><br><b>Peugeot</b> | <br><b>Das Original</b> |
| <b>Tightening Instructions for Cylinder Head</b> |   |  |
| <b>Instructions de serrage pour culasse</b>      |   |  |
| <b>Prescripciones de apriete para culatas</b>    |   |  |

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo



267.550  
M12x1,5x126



Anziehen/ ⚙️ 22 Nm  
Tightening/ 60 Nm  
Serrage/ ➤ 220°  
Apriete

**Zeichenerklärung / Explanations / Explication / Explicacion**

|    |   |                              |                                |                                      |
|----|---|------------------------------|--------------------------------|--------------------------------------|
| ⚙️ | neue Zylinderkopfschrauben verwenden        | use new cylinder head bolts  | utiliser des vis neuves        | emplar tornillos nuevos              |
| *  | Warmlauf (80°C)                             | warm up time (80°C)          | chauffage (80°C)               | calentamiento (80°C)                 |
| □  | Schrauben einzeln lösen und wieder anziehen | loosen and tighten each bolt | deserrer et serrer vis par vis | afojar y apretar tornillo a tornillo |
| ●  | Setzzeit                                    | relaxation time              | durée de tassement             | tiempo de espera                     |
| ➤  | Drehwinkel                                  | torque angle                 | angle de serrage               | ángulo de giro                       |

**Motortyp / Engine type / Type de moteur / Tipo de motor**

∅: 85,9 mm;  $\frac{1}{2}$ : 1,35 mm

Mot. 4HT, DW12BTED4, Q4BA  
2,2 ltr.HDI / TDCI / TD4

C5, C6, C8, 407, 607, 807 ab 04/06→  
Galaxy, Mondeo, S-Max ab 03/08→  
Freelander ab 10/06→

ElringKlinger AG, Max-Eyth-Str.2  
72581 Dettingen / Erms. Tel. 07123/724 601

**\*732.180\***