

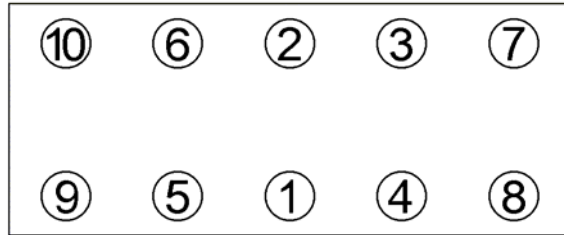


<b>Anziehvorschrift für Zylinderkopf</b>	<b>809.760</b> passend für / suitable for adaptable à / adaptable a <b>Opel</b>	 <b>Das Original</b>
<b>Tightening Instructions for Cylinder Head</b>		
<b>Instructions de serrage pour culasse</b>		
<b>Prescripciones de apriete para culatas</b>		

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo



803.050



Anziehen/ Tightening/	Y17DT/Y17DTL	Z17DTH/Z17DTL
Serrage/ Apriete	20 Nm	15 Nm
	➤ 40 Nm	➤ 39 Nm
	➤ 60°	➤ 60°
	➤ 13°	➤ 60°
	➤ 60°	
	➤ 13°	

**Zeichenerklärung / Explanations / Explication / Explicacion**

	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflorar y apretar tornillo a tornillo
	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

÷ 1,55 mm      3 Löcher

Mot. Y17DT, Y17DTL, Z17DTL, Z17DTH

Corsa C      2001 >

Astra / Zafira 1998 >

ElringKlinger AG, Max-Eyth-Str.2  
72581 Dettingen / Erms. Tel. 07123/724 601

**\*809.760\***