
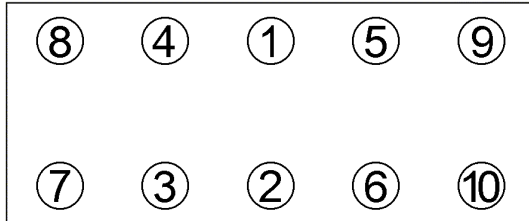


Anziehvorschrift für Zylinderkopf	262.871	 Das Original
Tightening Instructions for Cylinder Head		
Instructions de serrage pour culasse		
Prescripciones de apriete para culatas		
	passend für / suitable for adaptable à / adaptable a	Renault

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo



Anziehen/ Tightening/ Serrage/ Apriete	* ▶	Clio, Megane, Scenic 25 Nm 25 Nm 270° +/-10°	* ▶	Kangoo 25 Nm 25 Nm 225° +/-10°
---	--------	---	--------	---

Zeichenerklärung / Explanations / Explication / Explicacion

* ★ □ ● ▶	neue Zylinderkopfschrauben verwenden Wärmelauf (80°C) Schrauben einzeln lösen und wieder anziehen Setzzeit Drehwinkel	use new cylinder head bolts warm up time (80°C) loosen and tighten each bolt relaxation time torque angle	utiliser des vis neuves chauffage (80°C) deserrer et serrer vis par vis durée de tassement angle de serrage	emplar tornillos nuevos calentamiento (80°C) aflojar y apretar tornillo a tornillo tiempo de espera ángulo de giro
-----------------------	---	---	---	--

Motortyp / Engine type / Type de moteur / Tipo de motor

Ø: 77,5 mm; ±:0,6 mm

Mot: K9K 700, 704, 710, 712, 722, 728,
729, 790

1,5 ltr dCi
48-60 kW (65-82 PS)

Clio, Megane, Kangoo, Grand Scenic

ElringKlinger AG, Max-Eyth-Str.2
72581 Dettingen / Erms. Tel. 07123/724 601

262.871